


L U N A

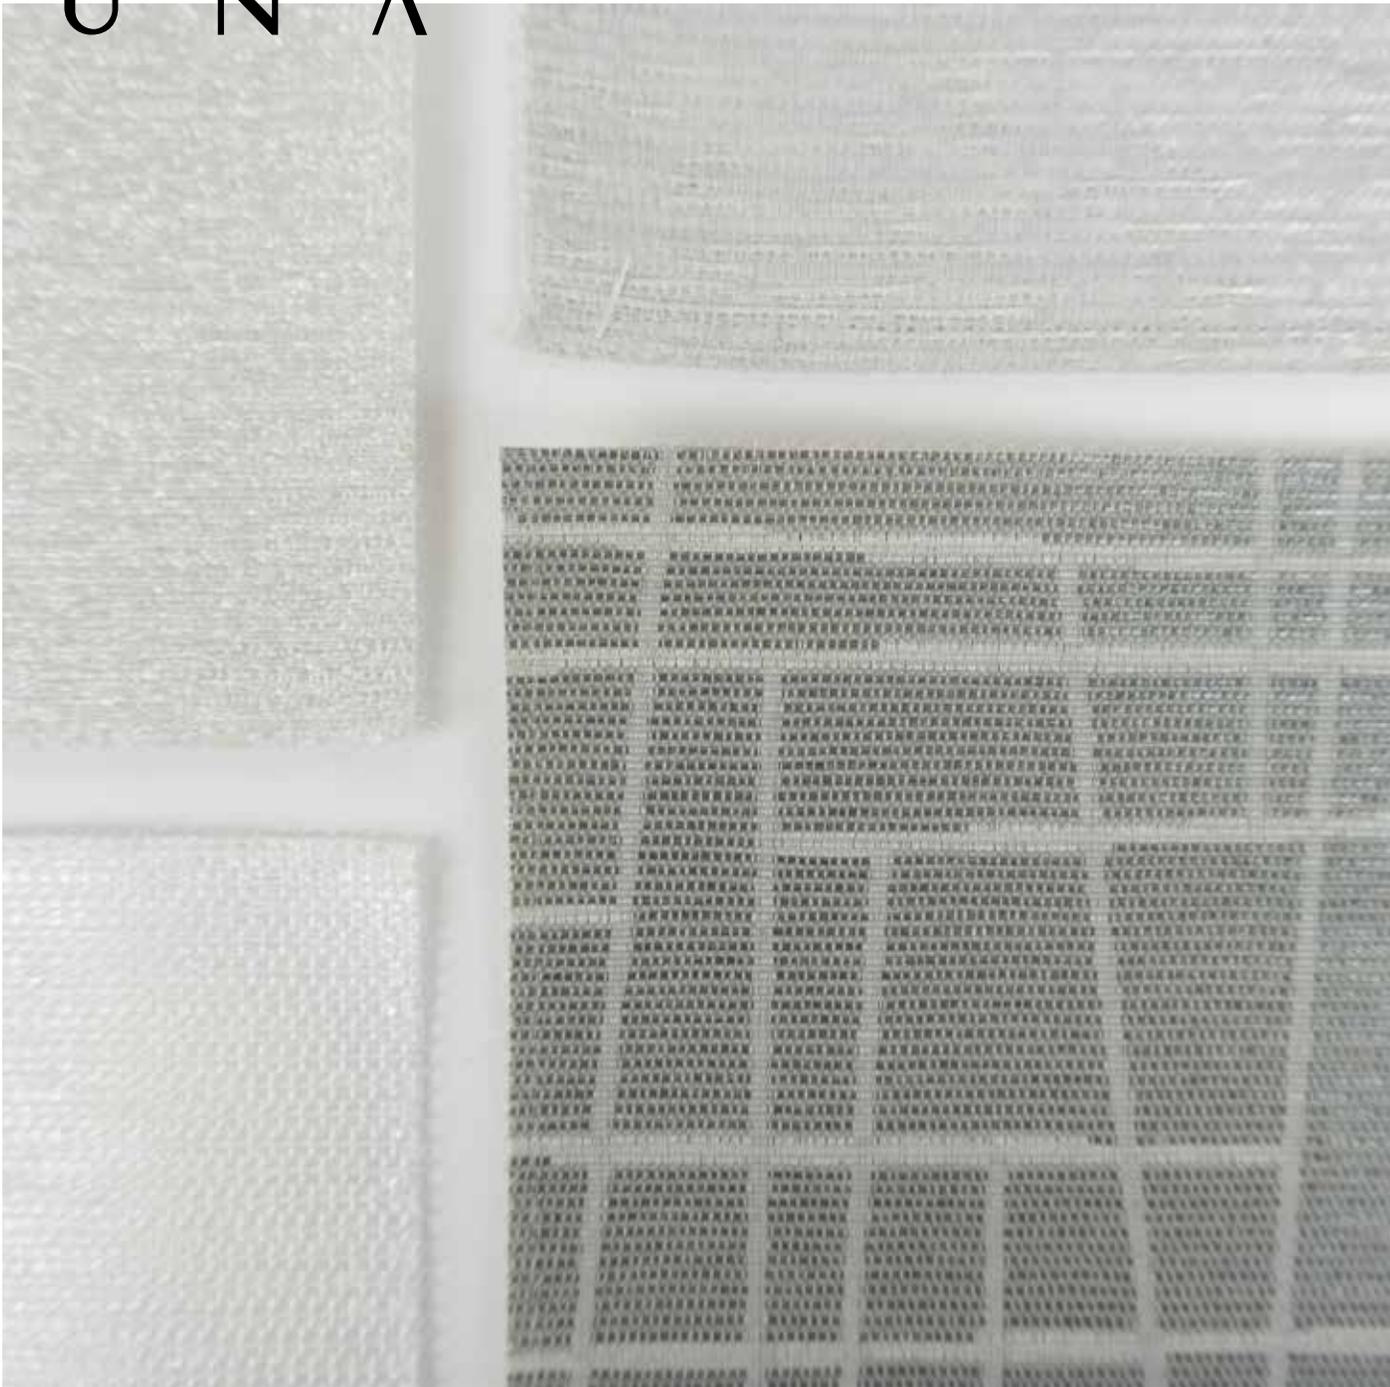

Luna Textiles' Guide to
**Woven
Wallcovering**

This guide is intended to provide all the details you need to specify wallcovering from Luna Textiles.

We have a program suited to hit your major wallcovering needs — from rich, textural sheen, to soft, subtle, and muted. Our collection is made entirely of high-performing woven wallcovering textiles.

Luna Textiles wallcovering collection comes from the intent to bring a natural texture to any space, but in a high-performance way. Our small, but mighty collection of wallcoverings does just that. Covering a mix of weaves and providing classic looks, our products have you covered.



Specification & Performance | 04

Wallcovering Products | 05

Frequently Asked Questions | 13

Installation Instructions | 14

Wallcovering Specifications & Performance Overview

All Luna Textiles wallcovering products are installed with a direct glue application. With a variety of high-performing attributes, they're easy to use in nearly all settings.

Application

All of our wallcovering goods are designed to be glued directly to the wall. They are suitable for use in both commercial and residential settings.

Woven Wallcovering Textiles

All of our wallcovering textiles are made of high-performing woven goods. The blend of yarns in each product are chosen to comply with all contract textile standards. These standards include flammability, lightfastness, wet and dry crocking, and more.

Backing

For a woven textile to be used as a wallcovering, it requires some kind of backing. All of ours use an acrylic backing. This prevents bleedthrough from the glue.

ASTM E 84 Class 1 (Adhered)

ASTM E84 is the standard flammability test required for any adhered wall products. This is a test that assesses the speed and behavior of the burning material, by lighting it on fire in an installation-like mockup. The results are

measured by the Flame Spread Index (FSI) and the Smoke Developed Index (SDI). There are 3 possible categories products can fall into depending on their results — all the Luna Textiles wallcovering options fall into Class 1 or A, which is the most fire-resistant category.

Cleanability

With wallcovering often being used intentionally in high traffic areas to protect standard drywall and paint from scuffing and general wear and tear, cleanability is usually a top priority. Our design team has established our wallcovering program with this in mind. Each product has a Stain Resistant finish. A couple of the products are even bleach cleanable, making things even easier to clean up.

Tackability

Due to the acrylic backing, our wallcoverings are generally not tackable. If you'd like a sample or yardage to mockup on different substrates to test tackability and see how visible any holes would be, please reach out to our customer service team.



Bedrock

Application

Wallcovering

Composition

63% Pre-Consumer Recycled Polyester,
37% Polypropylene

Finish

Stain Resistant

Backing

Acrylic

Width

54" (137cm)

Repeat


None

Flammability

ASTM E84 Class 1 (Adhered)

Maintenance

W/S



Chalk
UDR510



Alabaster
UDR511



Carrara
UDR512



Talc
UDR513



Flint
UDR514



Sandstone
UDR515



Concrete
UDR516



Oxide
UDR517



Obsidian
UDR518

Candela

Application

Wallcovering

Composition

37% Olefin, 33% Polyester, 30% Polyethylene

Finish

Stain Resistant

Backing

Acrylic

Width

54" (137cm)

Repeat

None

Flammability

ASTM E84 Class 1 (Adhered)

Maintenance

W/S/B

Notes

Bleach cleanable (10:1)



Glacier
UNA701



Dove
UNA702



Parchment
UNA703



Moon
UNA704



Canvas
UNA705



Orb
UNA706



Pebble
UNA707



Mineral
UNA708



Galaxy
UNA709



Idyll

Application

Wallcovering

Composition

100% Polyester

Finish

Crypton Wall

Backing

Acrylic

Width

54" (137cm)

Repeat

None

Flammability

ASTM E84 Class 1 (Adhered)

Maintenance

W/S



Skylight
UDY421



Duvet
UDY422



Elixir
UDY423




Kernel
UDY424



Native
UDY425



Heritage
UDY426

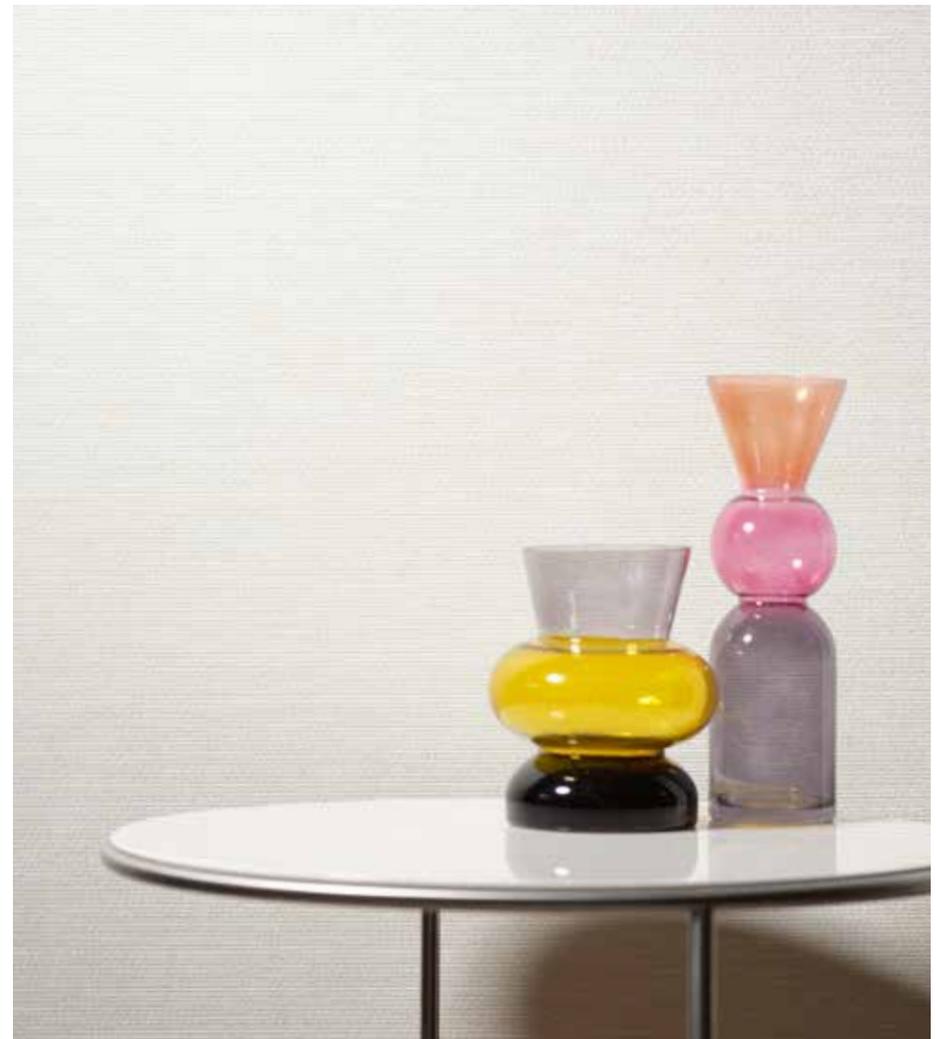

Incandescent

Application

Wallcovering

Composition

100% Polyester

Finish

Stain Resistant

Backing

Acrylic

Width

66" (168cm)

Repeat

None

Flammability

ASTM E84 Class 1 (Adhered)

Maintenance

W/S



Icecap
UNC411



Drizzle
UNC412



Arid
UNC413



Cloudburst
UNC414



Epoxy
UNC415



Sunshower
UNC416



Monsoon
UNC417



Intersect

Application

Wallcovering

Composition

69% Polyester, 31% Olefin

Finish

Stain Resistant

Backing

Acrylic

Width

56" (142cm)

Repeat

None

Flammability

ASTM E84 Class 1 (Adhered)

Maintenance

W/S



Wireframe
UNT521



Hacked
UNT522



Code
UNT523



Seed
UNT524



Synergy
UNT525



Disrupt
UNT526



Lumina

Application

Wallcovering

Composition

50% Polyethylene, 30% Polyester,
20% Post-Consumer Recycled Polyester

Finish

Stain Resistant

Backing

Acrylic

Width

54" (137cm)

Repeat

.2"V x .5"H

Flammability

ASTM E84 Class 1 (Adhered)

Maintenance

W/S/B

Notes

Bleach cleanable (10:1)



Radiance
UMA861



Opalesce
UMA862



Luster
UMA863



Gamma
UMA864



Flux
UMA865



Nova
UMA866



Slick
UMA867

Signal

Application

Wallcovering

Composition

63% Recycled Polyester, 37% Polypropylene

Finish

Stain Resistant

Backing

Acrylic

Width

54" (137cm)

Repeat

None

Flammability

ASTM E84 Class 1 (Adhered)

Maintenance

W/S



Mica
UGN381



Sequin
UGN382



Oxide
UGN383




Hematite
UGN384




Satin
UGN385



Strata
UGN386



Diamond
UGN387



Moonstone
UGN388



Caldera
UGN389



Woohl Wallcovering

Application

Wallcovering

Composition

60% Post-Consumer Recycled Polyester,
40% Polyester

Finish

Stain Resistant

Backing

Acrylic

Width

54" (137cm)

Repeat

None

Flammability

California Technical Bulletin 117-2013,
ASTM E84 Class 1 (Adhered)

Maintenance

W/S



Evening
UHL571



Matrix
UHL572



Fog
UHL573



Camellia
UHL574



Darling
UHL575



Sassy
UHL576



Beeswax
UHL577



Camel
UHL578



Marsh
UHL579



Drake
UHL580



Submarine
UHL581




Eddy
UHL582



Lagoon
UHL583



Anchor
UHL584

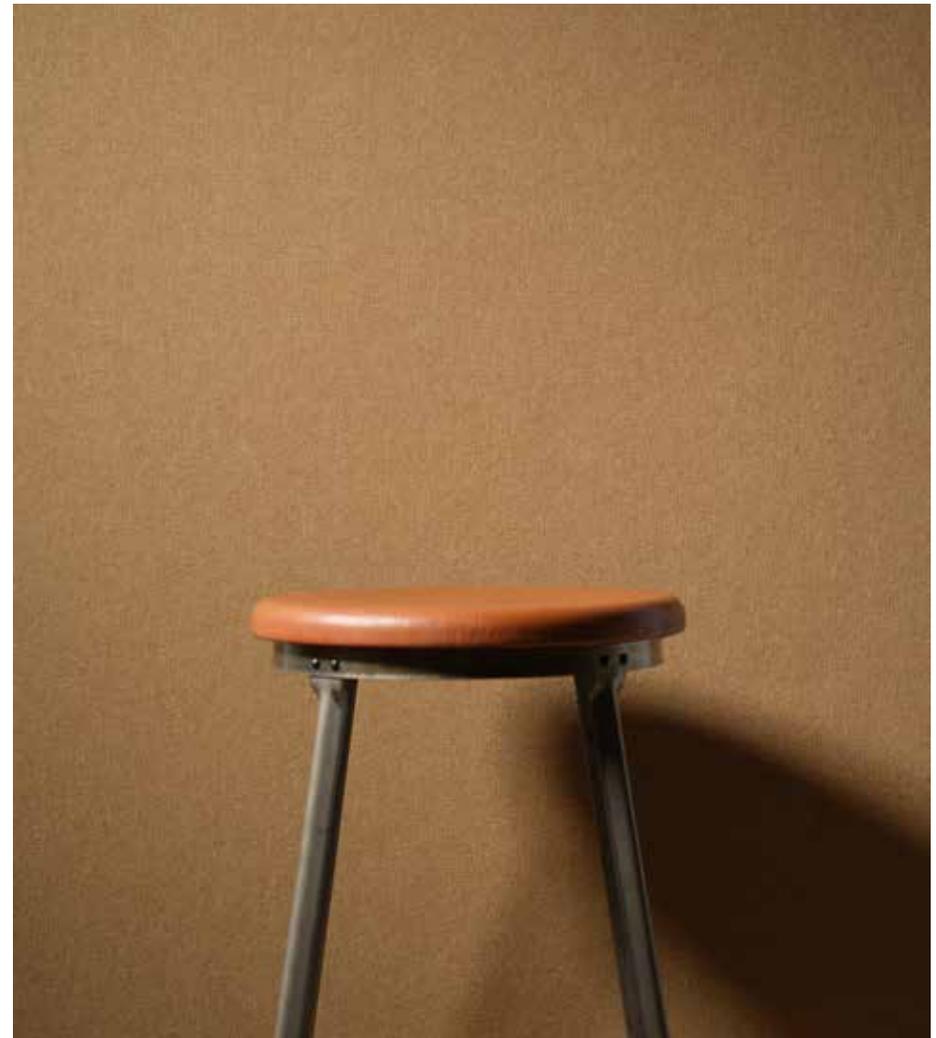

Frequently Asked Questions

This should answer many of your wallcovering questions. If we missed anything, of course feel free to contact our customer service department.

Are wallcovering and panel textiles interchangeable?

Generally, no, wallcovering and panel textiles are not interchangeable. Due to how they're installed and the flammability requirements of each, they can only be used in one application or the other. Check our website for which products can be used in which applications.

What types of wallcoverings to do you offer?

All of our wallcoverings are woven textiles with backing and/or finishes needed for a direct glue application.

What value does wallcovering provide to a space?

Other than of course an intentional added design element, bringing warmth and texture to any space, wallcovering adds durability! Especially in high traffic areas that are prone to scuffed walls and could damage easily, wallcovering provides a layer of protection. These textiles are generally easy to clean up

— some are even bleach cleanable. All around they protect walls while adding a beautiful design element.

How is wallcovering applied?

See a full installation how-to later in this guide. All of our wallcovering textiles require a direct glue application. For additional information, you can find a video on the Luna Textiles's website.

Can we get mock ups of wallcoverings?

Of course! Talk to your sales rep to get the mock up yardage you need.

Do wallcovering textiles provide any acoustical benefits?

On their own, they do not. Like many panel fabrics, any acoustical properties would come from the substrate the textiles are adhered to.

How are Luna's wallcoverings sold?

Similar to any of our upholstery fabrics, all of the goods are sold by the yard and shipped on the roll. The installer should convert the measurements

from square feet to linear yards and should be able to provide yardage requirements. The widths of our wallcoverings vary, so please check our website for each specific product.

Are these woven wallcoverings categorized as Type II?

Type II refers specifically to non-woven wallcoverings. So while technically it is not, it does meet comparable standards for performance and durability.

Wallcovering Installation Instructions

Storing Wallcovering Material

Store material in a clean, dry place. Do not stand on end. Do not crush, crease, fold, or bend. Prior to cutting, inspect each roll for damages, defects, and to verify that you have received the correct design and color.

Wall Preparation

Wall surface should be clean, dry, smooth, of uniform color, and properly primed and sealed. For best results, the primer color should be similar to the wallcovering color.

Adhesive

Use a heavy-duty, pre-mixed, low-water content, clear, wallcovering adhesive. Do not dilute. For acrylic-backed fabrics, apply adhesive to the wall, not to the fabric. For paper-backed fabrics, apply adhesive to the paper backing and allow the paper to uniformly absorb the adhesive before installing.

Hanging Instructions

Prior to cutting, inspect each roll for damages, defects, and to verify that you have received the correct design and color. Fabric may not be returned after it's cut. If you have any questions or problems after hanging the first 3 strips, STOP, and call our customer service (415-252-7125). We will not accept claims after more than 3 strips have been cut and installed.

01. Install wallcovering at room temperature.
02. Table-cutting or double-cutting on the wall is at the discretion of the installer. Use a new blade for each trim.
03. Allow adhesive to set-up on the wall before hanging, so that it's sufficiently tacky not to bleed through to the surface of the fabric during installation.
04. Install fabric strips straight up, as they come off the bolt, and in consecutive order.

05. Seams should be no closer than 6 inches to corners.
06. Avoid excessive pressure to the surface of the fabric during installation which may cause adhesive to bleed through to the surface.
07. Excess adhesive on the face of the fabric can be allowed to dry and then removed with a dry brush, or, if the wallcovering is water resistant, the adhesive can be removed immediately with a wet sponge.

These instructions are provided as a general guide. Installation by a professional wallcovering installer is recommended for best results.

Suggested Rotations

If you'd like these for your rotations, please request them by name through our sample department. They'll get these pulled and shipped to you for your presenting needs.



Lumina Radiance UMA861

Signal Mica UGN381

Candela Dove UNA702

Incandescent Icecap UNC411

Idyll Skylight UDY421

Intersect Wireframe UNT521



Candela Orb UNA706

Signal Diamond UGN387

Incandescent Monsoon UNC417

Candela Galaxy UNA709

Lumina Slick UMA867

Intersect Disrupt UNT526

Woolh Matrix UHL572

LUNNA

